


**DOCKS**  
*Contemporary essence*

**VIEW<sup>®</sup>**

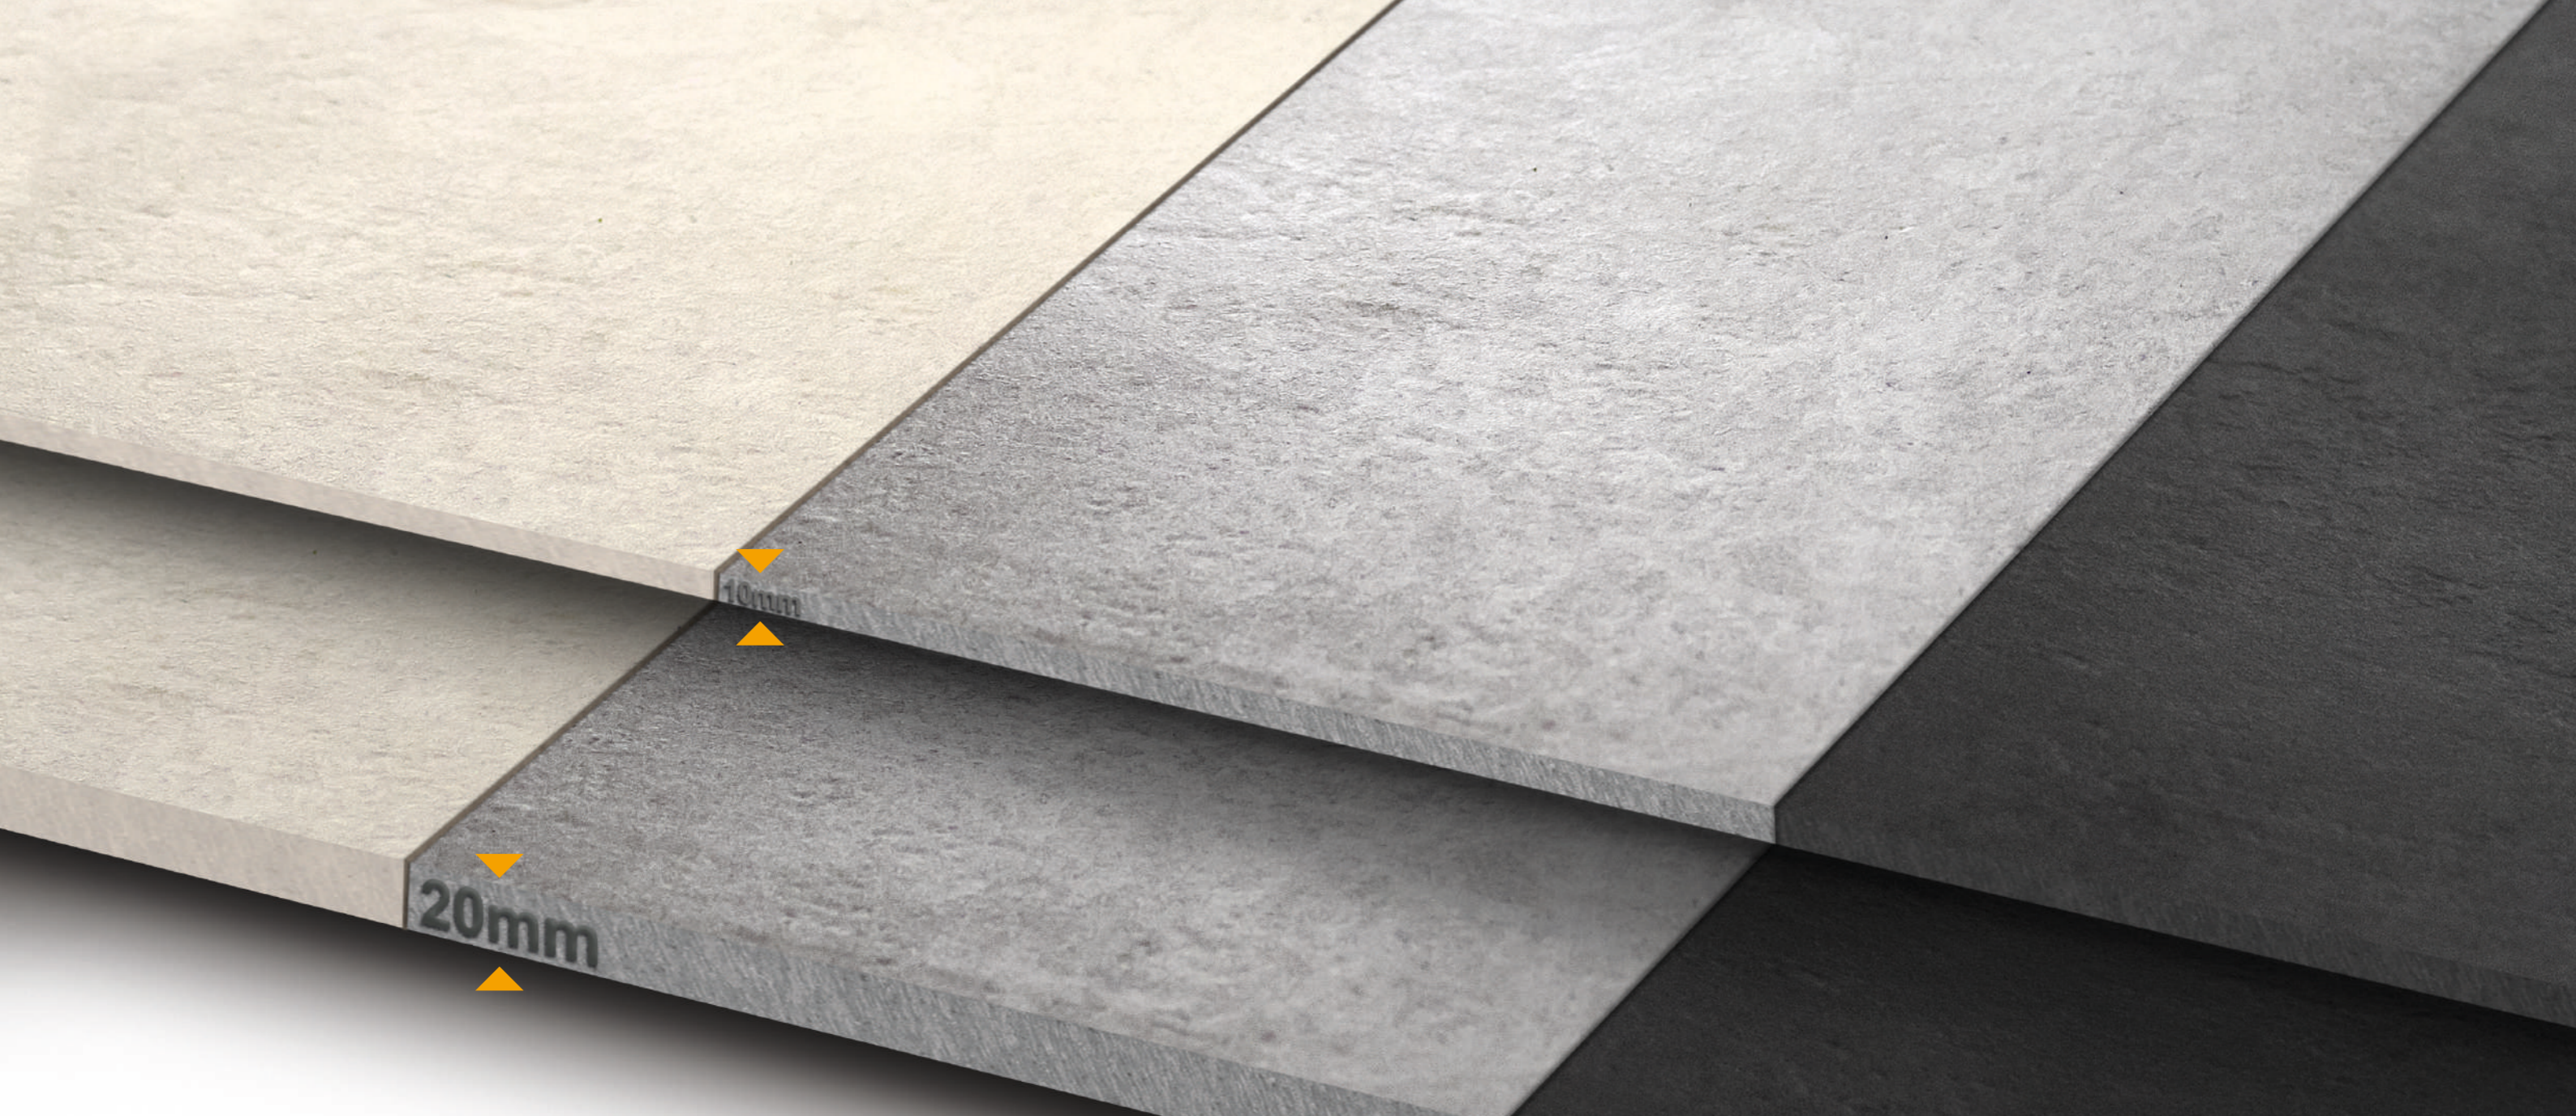

# Docks

IN&OUT

Size  
100x100

SABBIA  
GRIGIO  
ANTRACITE





wall outdoor  
**Antracite 100x100 Rettificato**  
floor outdoor  
**Grigio 100x100 20mm Grip**  
**Antracite Griglia/Grid 18,5x100 20mm Grip**  
**Antracite Gradone Lineare 30x100 20mm Grip**

wall indoor  
**Antracite 100x100 Rettificato**  
floor indoor  
**Grigio 100x100 Rettificato**





floor indoor  
**Antracite 100x100 Rettificato**  
floor outdoor  
**Antracite 100x100 20mm Grip**



Sabbia



Grigio



Antracite



**Grigio** - Size 100x100 Rettificato




**Sabbia** - Size 100x100 Rettificato



**Antracite** - Size 100x100 Rettificato

RETTIFICATO




100x100  
40"x40"

GRIP R11 RETTIFICATO 20mm




100x100  
40"x40"


Pezzi speciali - Trims - Formstücke - Pieces speciales




Battiscopa  
6,5x100 - 2,5"x40"



Gradone Lineare  
30x100 - 12"x40"



Gradone Angolare Dx-Sx Lineare  
30x100 - 12"x40"



Gradone Step AntiSlip  
30x100 - 12"x40"

Caratteristiche tecniche - Technical features  
Technische Eigenschaften - Caractéristiques techniques

Norma UNI EN 14411	Valori View View values View Werte Valeur View	Tipo di prova Standard of test Testnorm Norme du test
<b>Gruppo BIa GL</b>		
Assorbimento d'acqua Water absorption Wasseraufnahme Absorption d'eau	≤ 0,5%	ISO 10545-3
Resistenza alla flessione Bending strenght Biegefestigkeit Résistance à la flexion	Conforme	ISO 10545-4
Resistenza al gelo Frost resistance Frostwiderstandsfähigkeit Résistance au gel	Ingelivo Frost-proof Frostsicher Ingélif	ISO 10545-12
Resistenza chimica Chemical resistance Chemicalienfestigkeit Résistance chimique	Inattaccabile Unaffected Nicht angegriffen Inattaquable	ISO 10545-13
Scivolosità Anti-slip index Rutschheremmung Coefficient anti-dérapage	<b>Naturale: R10 / "B"</b>	DIN 51130 / R-DIN 51097
	<b>Grip: R11 / C</b>	DIN 51130 / R-DIN 51097

ISTRUZIONI PER LA POSA

Si consiglia una fuga minima di 2 mm, e di 3 mm per la versione Retró.  
Miscelare i prodotti da più scatole.

ISTRUCTION POUR LA POSE


Nous vous recommandons de laisser une entrée de minimum de 2 mm, et 3 mm pour la version Retró.  
Mélanger les produits de plusieurs boîtes.

LAYING INSTRUCTION

We recommend a gap of at least 2 mm and 3 mm for the version Retró.  
Mix products from multiple boxes.

VERLEGUNGSHINWEISE

Es wird eine Fuge von mindestens 2 mm, und 3 mm für die Retró empfohlen.  
Die Produkte aus mehreren Schachteln mischen.



**V2**  
Lieve variazione  
Slight variations  
Geringe  
abweichung  
Légère variation

Imballi - Packages - Verpackungen - Emballages

FORMATI Sizes Formats Formate						
	Pz x Box	M <sup>2</sup> x Box	Kg x Box	Box x Pall.	M <sup>2</sup> x Pall.	Kg x Pall.
100x100 Rett.	2	2	47,00	24	48	1128
100x100 Rett./ Grip 20mm	1	1	47,50	21	21	997,5

Merchandising



Sinottico Standard 100x200 Versione A



Sinottico Standard 100x200 Versione B



Culla Piana 10+20 mm Docks 4 postazioni



**VIEW**<sup>®</sup>  
s.r.l

VIA MONCHIO, 46  
41042 FIORANO MODENESE (MO) - ITALY  
TEL +39 0536 808029  
FAX +39 0536 808157  
[info@viewceramiche.com](mailto:info@viewceramiche.com)  
[www.viewceramiche.com](http://www.viewceramiche.com)