

SOVERAIA
GREY
60x120 Levigato



SOVERAIA GREY

LEVIGATO & MATT



60x120
(N°8 patterns/screens)



60x60
(N°16 patterns/screens)

SOVERAIA SILVER

LEVIGATO & MATT



60x120
(N°8 patterns/screens)



60x60
(N°16 patterns/screens)

SOVERAIA BEIGE

LEVIGATO & MATT



60x120
(N°8 patterns/screens)



60x60
(N°16 patterns/screens)

PULPIS GRIS

LEVIGATO & MATT



60x120
(N°14 patterns/screens)



60x60
(N°28 patterns/screens)

PULPIS TAUPE

LEVIGATO & MATT



60x120
(N°14 patterns/screens)



60x60
(N°28 patterns/screens)

PULPIS IVOIRE

LEVIGATO & MATT



60x120
(N°14 patterns/screens)



60x60
(N°28 patterns/screens)

STATUARIO

LEVIGATO & MATT



60x120
(N°26 patterns/screens)



60x60
(N°52 patterns/screens)

CALACATTA

LEVIGATO & MATT




60x120
(N°16 patterns/screens)



60x60
(N°32 patterns/screens)

SAHARA NOIR

LEVIGATO & MATT

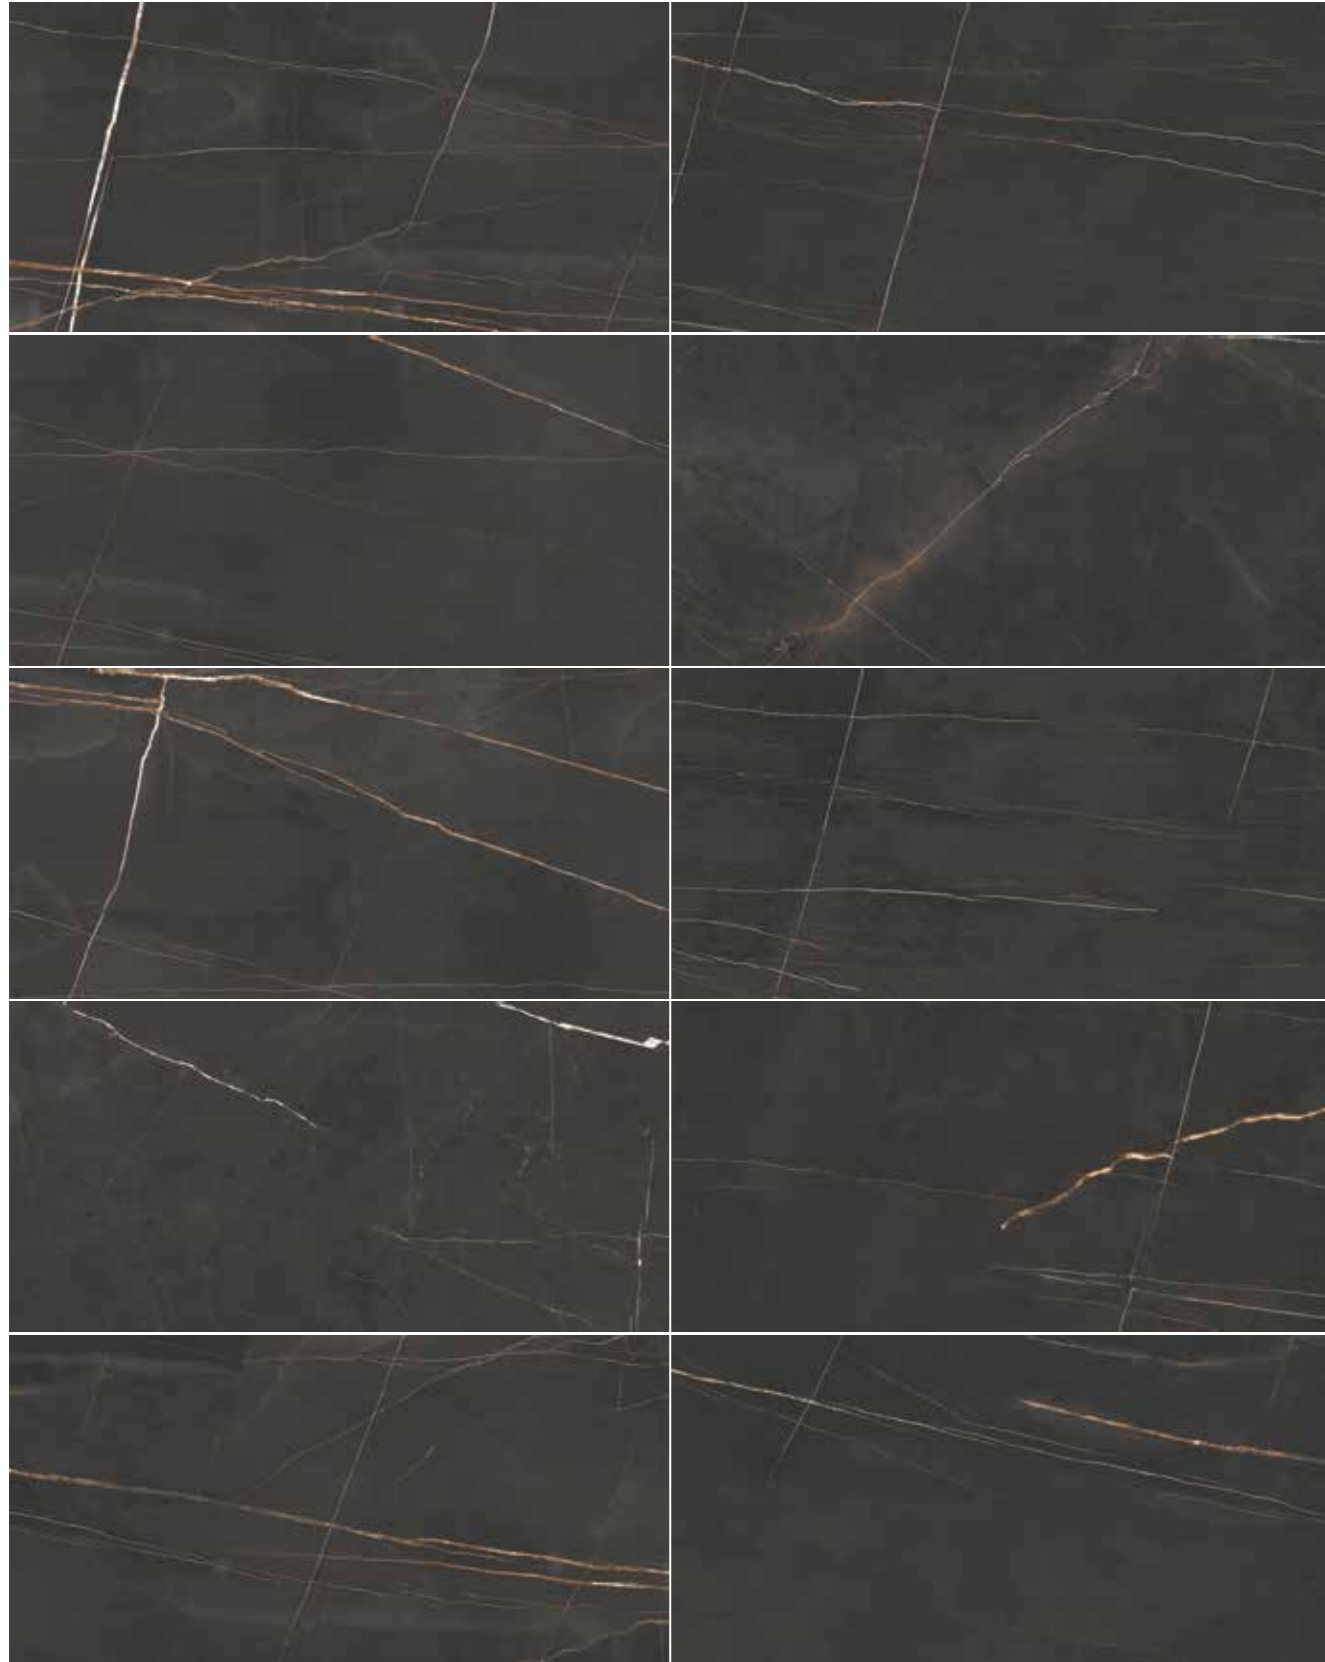

60x120
(N°12 patterns/screens)



60x60
(N°24 patterns/screens)

* NB: Calibro non corrispondente tra finitura Levigata & Matt - Work size doesn't match between polished and matt finishing

FORMATI - sizes - formats - Formate

Spessore - Thickness - Stärke - Épaisseur **10**

MATT



60x120
24"x48"

60x60
24"x24"


LEVIGATO



60x120
24"x48"

60x60
24"x24"

Pezzi speciali - Trims - Formstücke - Pieces speciales



Battiscopa
6x120 - 2,4"x48"

Gradone Lineare Costa Retta Elle
30x120 - 12"x48"
30x60 - 12"x24"

Gradone Angolare Costa Retta Elle
30x120 - 12"x48"
30x60 - 12"x24"

Merchandising



Sinottico Standard 100x200 Versione A



Sinottico Standard 100x200 Versione B



Culla Modula Marmi



Culla Piana Marmi 6+9 postazioni

Caratteristiche tecniche - Technical features
Technische Eigenschaften - Caractéristiques techniques

Norma UNI EN 14411 Gruppo BIa UGL	Valori View View values View Werte Valeur View	Tipo di prova Standard of test Testnorm Norme du test
Assorbimento d'acqua Water absorption Wasseraufnahme Absorption d'eau	≤ 0,5%	ISO 10545-3
Resistenza alla flessione Bending strenght Biegefestigkeit Résistance à la flexion	Conforme	ISO 10545-4
Resistenza al gelo Frost resistance Frostwiderstandsfähigkeit Résistance au gel	Ingelivo Frost-proof Frostsicher Ingélif	ISO 10545-12
Resistenza chimica Chemical resistance Chemicalienfestigkeit Résistance chimique	Inattaccabile Unaffected Nicht angegriffen Inattaquable	ISO 10545-13
Scivolosità Anti-slip index Rutschheremmung Coefficient anti-dérapage	Matt: R10 / "A"	DIN 51130 / R-DIN 51097

Imballi - Packages - Verpackungen - Emballages

FORMATI Sizes Formats Formate						
	Pz x Box	M ² x Box	Kg x Box	Box x Pall.	M ² x Pall.	Kg x Pall.
60x120 Rett. Lev. / Matt	2	1,44	32,00	32	46,08	1024
60x60 Rett. Lev. / Matt	3	1,08	24,50	32	34,56	784

ISTRUZIONI PER LA POSA

Si consiglia una fuga minima di 2 mm, e utilizzo di colla autolivellante a doppia spalmatura

LAYING INSTRUCTION

We recommend a gap of at least 2 mm and use of self-leveling glue double coating


VERLEGUNGSHINWEISE

Es wird eine Fuge von mindestens 2 mm, und Verwendung von selbstnivellierender Kleber Doppelbeschichtung

INSTRUCTION POUR LA POSE


Nous vous recommandons de laisser une entrée de minimum de 2 mm, et l'utilisation de colle autonivelante double revêtement

Variazione di stonalizzazione - Color/shade variation guideline
Brandfarben Mischungstabelle - Effets nuancés possible




V1

Aspetto uniforme
Uniform appearance
Einheitliches aussehen
Aspect uniforme




V2

Lieve variazione
Slight variations
Geringe abweichung
Légère variation



V3

Moderata variazione
Moderate variations
Mässige abweichung
Variation modérée



V4

Forte stonalizzazione
Substantial variations
Akzentuierte variation
Effet dénuancé très accentué

VIEW[®] s.r.l

VIA MONCHIO, 46
41042 FIORANO MODENESE (MO) - ITALY
TEL +39 0536 808029
FAX +39 0536 808157
info@viewceramiche.com
www.viewceramiche.com